


SERIES

VVO

HORIZONTAL VIBRATING SCREEN

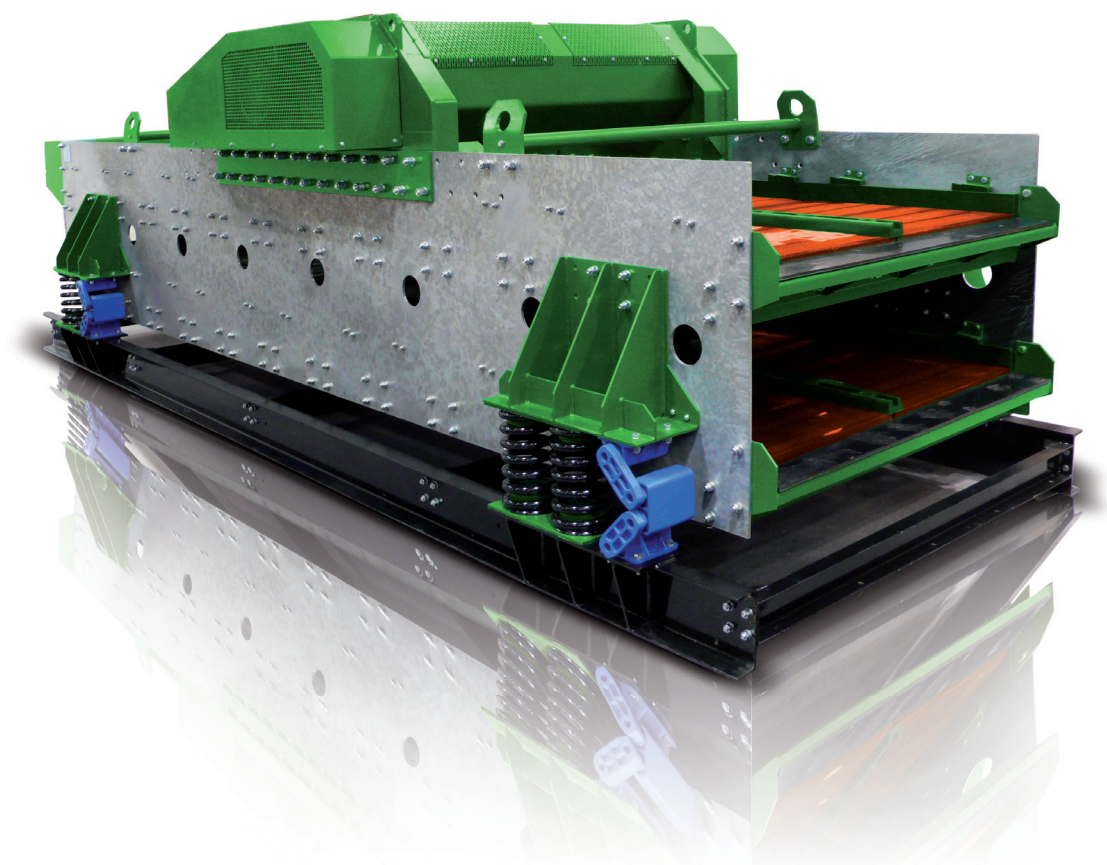

MINING – AGGREGATES INDUSTRY – WASTE TREATMENT

The screen for special tasks

COMEC 

www.comec.it

TASKS


COMEC horizontal screens are mainly used for wet or dry screening, in environments with limited space.

SOLUTION



A group of oscillating rods containing four oil- or grease-lubricated vibrating units is arranged above the screening unit, in the form of two eccentric axes. The weights can be adjusted to the parameters of each case and produce either a linear or an elliptical movement of the screen. The screen deck combination is customized to meet your individual needs.

BENEFIT

Due to the flexible control of their vibrating parameters, installation angle and speed, COMEC horizontal screens enable optimal adjustment to any possible task. The elliptical trajectory avoids clogging, thus ensuring reliable scalping even for difficult grain sizes. Easy maintenance – especially due to the generous distance between screening decks – and a long life make for a highly economical concept.



Technical data												
Model	Decks	Deck size AxB	Dimensions in mm						Amplitude min./max.	Speed min./max.	Power	Weight
			L	W	H	C	D	E				
WO 1542	2	1500x4000	4655	2080	1730	1150	1855	2750	11-19	700-875	2x9,2	3300
WO 1543	3	1500x4000	4655	2080	2160	1515	1855	2750	11-18	700-875	2x11	4800
WO 1552	2	1500x5000	5655	2075	1730	1150	1855	3750	11-19	700-875	2x9,2	4200
WO 1553	3	1500x5000	5655	2075	2160	1515	1855	3750	11-18	700-875	2x11	6000
WO 1554	4	1500x5000	5655	2075	2556	1900	1855	3750	11-17	700-875	2x11	7285
WO 1852	2	1800x5000	5655	2435	1700	1150	2154	3750	11-17	700-875	2x11	5860
WO 1853	3	1800x5000	5655	2435	2160	1515	2154	3750	12-18	700-875	2x15	7810
WO 1862	2	1800x6000	6655	2435	1700	1150	2154	4750	11-16	700-875	2x11	6540
WO 1863	3	1800x6000	6655	2435	2160	1515	2154	4750	11-17	700-875	2x15	8800
WO 1864	4	1800x6000	6655	2435	2735	2000	2154	4750	11-17	700-875	2x18,5	10880
WO 2162	2	2100x6000	6655	2735	1780	1150	2454	4750	12-18	700-875	2x15	7580
WO 2163	3	2100x6000	6655	2735	2160	1515	2454	4750	11-16	700-875	2x15	9480

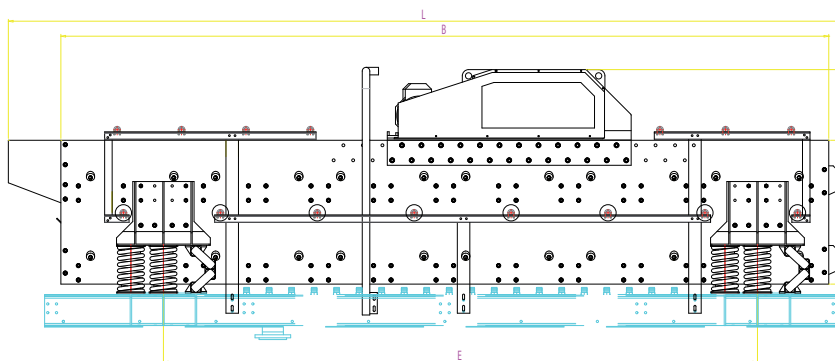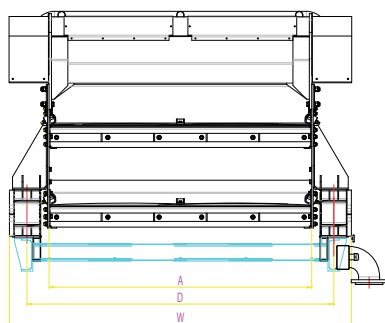

COLOUR

COMEC offers the opportunity to customize both your equipment and production lines with your desired colours, in order to support your own corporate design.

Features and sizes are not binding and Comec-Binder S.r.l. reserves to effect modifications or improvements for commercial and technical reasons at any moment and without notice.